

#### Is Now Part of



# ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <a href="https://www.onsemi.com">www.onsemi.com</a>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA Class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, emplo



## NC7SZD384

# 1-Bit Low Power Bus Switch with Level Shifting

#### **General Description**

The NC7SZD384 provides 1-bit of high-speed CMOS TTL-compatible bus switch. The low on resistance of the switch allows inputs to be connected to outputs with minimal propagation delay and without generating additional ground bounce noise. The device is organized as a 1-bit switch with a bus enable  $\overline{(OE)}$  signal. When  $\overline{OE}$  is LOW, the switch is on and Port A is connected to Port B. When  $\overline{OE}$  is HIGH, the switch is open and a high-impedance state exists between the two ports. Reduced voltage drive to the gate of the FET switch permits nominal level shifting of 5V to 3.3V through the switch.

#### **Features**

- Space saving SOT23 or SC70 5-lead package
- Ultra small MicroPak™ Pb-Free leadless package
- $\blacksquare$  5 $\Omega$  switch connection between two ports
- Designed to be used in level-shifting applications
- Minimal propagation delay through the switch
- Low I<sub>CC</sub>
- Zero bounce in flow-through mode
- Control inputs compatible with TTL level


#### **Ordering Code:**

Order	Package	Product Code	Package Description	Supplied As
Number	Number	Top Mark	Fackage Description	Supplied As
NC7SZD384M5X	MA05B	8Z4D	5-Lead SOT23, JEDEC MO-178, 1.6mm	3k Units on Tape and Reel
NC7SZD384P5X	MAA05A	Z4D	5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3k Units on Tape and Reel
NC7SZD384L6X	MAC06A	A4	Pb-Free 6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel

Pb-Free package per JEDEC J-STD-020B.

 $\label{eq:microPak} \mbox{MicroPak}^{\tiny{\text{TM}}} \mbox{ is a trademark of Fairchild Semiconductor Corporation.}$ 

## **Logic Symbol**



## **Pin Descriptions**


Pin Name	Description
OE	Bus Switch Enable
Α	Bus A
В	Bus B
NC	No Connect

### **Function Table**


OE	B <sub>O</sub>	Function
L	A <sub>O</sub>	Connect
Н	HIGH-Z State	Disconnect

## **Connection Diagrams**

Pin Assignments for SC70 and SOT23



Pad Assignments for MicroPak



(Top Through View)

## **Absolute Maximum Ratings**(Note 1)

Supply Voltage (V <sub>CC</sub> )	-0.5V to $+7.0V$
DC Switch Voltage (VS)	-0.5V to $+7.0V$
DC Input Voltage (V <sub>IN</sub> ) (Note 2)	-0.5V to $+7.0V$
DC Input Diode Current ( $I_{IK}$ ) $V_{IN} < 0V$	-50 mA
DC Output (I <sub>OUT</sub> ) Sink Current	128 mA
DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> /GND)	±100 mA
Storage Temperature Range (T <sub>STG</sub> )	-65°C to +150°C
Junction Temperature under bias (T <sub>J</sub> )	+150°C
Junction Lead Temperature (T <sub>L</sub> )	
(Soldering, 10 seconds)	+260°C
Power Dissipation (P <sub>D</sub> ) @ +85°C	
SOT23-5	200 mW
SC70-5	150 mW

# **Recommended Operating Conditions** (Note 3)

Power Supply Operating (V <sub>CC</sub> )	4.5V to 5.5V
Input Voltage (V <sub>IN</sub> )	0V to 5.5V
Output Voltage (V <sub>OUT</sub> )	0V to 5.5V
Input Rise and Fall Time (t <sub>r</sub> , t <sub>f</sub> )	
Switch Control Input	0 ns/V to 5 ns
Switch I/O	0 ns/V to DC
Operating Temperature (T <sub>A</sub> )	-40°C to +85°C
Thermal Resistance ( $\theta_{JA}$ )	
SOT23-5	300°C/Watt
SC70-5	425°C/Watt

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:** The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

Note 3: Unused inputs must be held HIGH or LOW. They may not float.

#### **DC Electrical Characteristics**

		V <sub>cc</sub>	T	<sub>A</sub> = -40°C to +85	°C		Conditions	
Symbol	Parameter	(V)	Min	Typ (Note 4)	Max	Units		
V <sub>IK</sub>	Maximum Clamp Diode Voltage	4.5			-1.2	-V	I <sub>IN</sub> = -18 mA	
V <sub>IH</sub>	HIGH Level Input Voltage	4.5-5.5	2.0			V		
$V_{IL}$	LOW Level Input Voltage	4.5-5.5			8.0	V		
V <sub>OH</sub>	HIGH Level Output Voltage	4.5-5.5		See Figure 3		V	$V_{IN} = V_{CC}$	
կ	Input Leakage Current	0-5.5			±1.0	μА	$0 \le V_{IN} \le 5.5V$	
I <sub>OFF</sub>	"OFF" Leakage Current	5.5			±10.0	μА	$0 \le A, B, \le V_{CC}$	
R <sub>ON</sub>	Switch On Resistance (Note 5)	4.5		5.0	7.0	Ω	V <sub>IN</sub> = 0V, I <sub>I</sub> = 64 mA	
				5.0	7.0	Ω	$V_{IN} = 0V$ , $I_I = 30 \text{ mA}$	
				35.0	50.0	Ω	V <sub>IN</sub> = 2.4V, I <sub>I</sub> = 15 mA	
I <sub>CC</sub>	Quiescent Supply Current						$V_{IN} = V_{CC}$ or GND, $I_O = 0$	
	Switch On	5.5		0.8	1.5	mA	OE = GND	
	Switch Off	5.5			10.0	μΑ	OE = V <sub>CC</sub>	
Δl <sub>CC</sub>	Increase in I <sub>CC</sub> per Input (Note 6)	5.5		0.8	2.5	mA	OE = 3.4V, I <sub>O</sub> = 0,	
							Control Input only.	

Note 4: All typical values are at  $V_{CC}=5.0V,\,T_{A}\!\!=25^{\circ}C.$ 

Note 5: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 6: Per TTL driven input ( $V_{IN} = 3.4V$ , control input only). A and B pins do not contribute to  $I_{CC.}$ 

#### **AC Electrical Characteristics**

Sumbal	Davamatan	v <sub>cc</sub>	$T_A = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ $C_1 = 50 \text{ pF, RU} = \text{RD} = 500\Omega$			Units	Conditions	Figure
Symbol	Parameter	(V)	Min	Min Typ Max		Units	Conditions	Figure Number
t <sub>PHL</sub> ,	Propagation Delay Bus-to-Bus (Note 8)	4.5–5.5		(Note 7)	0.25	ns	V <sub>I</sub> = OPEN	Figures 1, 2
t <sub>PZL</sub> , t <sub>PZH</sub>	Output Enable Time	4.5–5.5	1.5		7.5	ns	$V_I = 7V$ for $t_{PZL}$ $V_I = OPEN$ for $t_{PZH}$	Figures 1, 2
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Output Disable Time	4.5–5.5	1.0		6.0		$V_I = 7V$ for $t_{PLZ}$ $V_I = OPEN$ for $t_{PHZ}$	Figures 1, 2

Note 7: All typical values are  $V_{CC}=5.0V,\,T_A=25\,^{\circ}C.$ 

Note 8: This parameter is guaranteed by design but is not tested. The bus switch contributes no propagation delay other than the RC delay of the typical On Resistance of the switch and the 50 pF load capacitance, when driven by an ideal voltage source (zero output impedance).

#### Capacitance (Note 9)

Symbol	Parameter	Тур	Max	Units	Conditions
C <sub>IN</sub>	Control Pin Input Capacitance	2	5	pF	V <sub>CC</sub> = 5.0V
C <sub>I/O</sub>	Input/Output Capacitance	4.5	10	pF	V <sub>CC</sub> = 5.0V

Note 9:  $T_A = 25^{\circ}C$  f = 1MHz

## **AC Loading and Waveforms**




FIGURE 1. AC Test Circuit

Note: Input driven by  $50\Omega$  source terminated in  $50\Omega$ .

C<sub>L</sub> includes load and stray capacitance.

Input PRR =  $1.0 \text{ MHz } t_w = 500 \text{ ns.}$ 

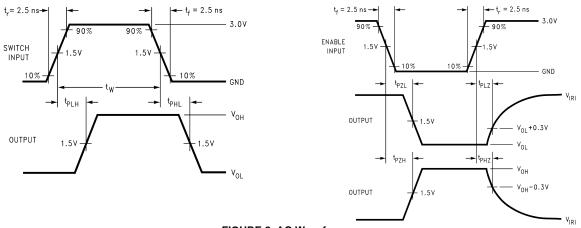




FIGURE 2. AC Waveforms

#### **DC Characteristics**









FIGURE 3. Typical High Level Output Voltage vs. Supply Voltage


## **Tape and Reel Specification**


#### TAPE FORMAT for SC70 and SOT23

Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
M5X, P5X	Carrier	3000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

#### TAPE DIMENSIONS inches (millimeters)

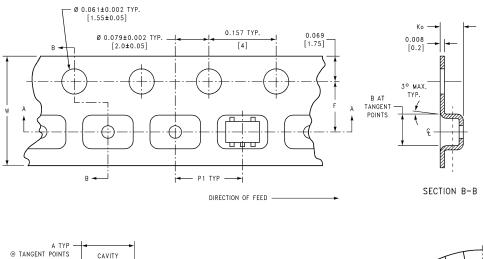






BEND RADIUS NOT TO SCALE


Package	Tape Size	DIM A	DIM B	DIM F	DIM K <sub>o</sub>	DIM P1	DIM W
SC70-5	9 mm	0.093	0.096	$0.138 \pm 0.004$	$0.053 \pm 0.004$	0.157	$0.315 \pm 0.004$
SC70-5	8 mm	(2.35)	(2.45)	$(3.5 \pm 0.10)$	(1.35 ± 0.10)	(4)	(8 ± 0.1)
COT22 F 0		0.130	0.130	$0.138 \pm 0.002$	$0.055 \pm 0.004$	0.157	$0.315 \pm 0.012$
SOT23-5	8 mm	(3.3)	(3.3)	$(3.5 \pm 0.05)$	(1.4 ± 0.11)	(4)	$(8 \pm 0.3)$

**TAPE FORMAT for MicroPak** 

Package	Tape	Number	Cavity	Cover Tape
Designator	Section	Cavities	Status	Status
	Leader (Start End)	125 (typ)	Empty	Sealed
L6X	Carrier	5000	Filled	Sealed
	Trailer (Hub End)	75 (typ)	Empty	Sealed

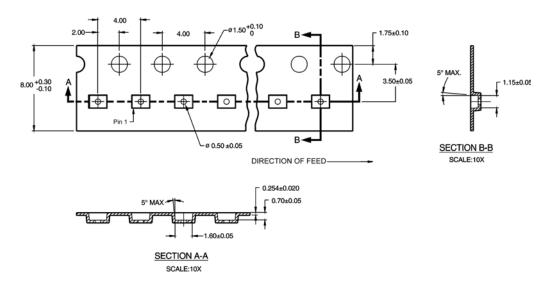


#### **REEL DIMENSIONS** inches (millimeters)

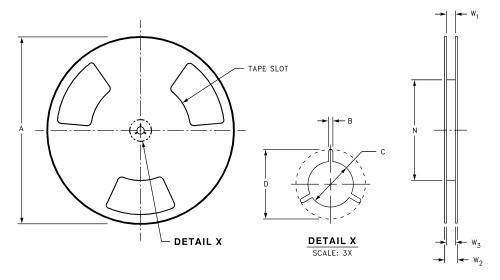


Tape Size	Α	В	С	D	N	W1	W2	W3
0 mm	7.0	0.059	0.512	0.795	2.165	0.331 + 0.059/-0.000	0.567	W1 + 0.078/-0.039
8 mm	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)

## Physical Dimensions inches (millimeters) unless otherwise noted

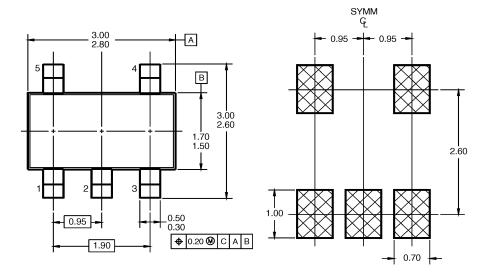


#### LAND PATTERN RECOMMENDATION

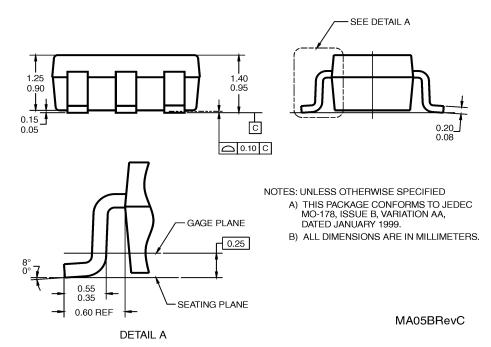

5-Lead SOT23, JEDEC MO-178, 1.6mm Package Number MA05B

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

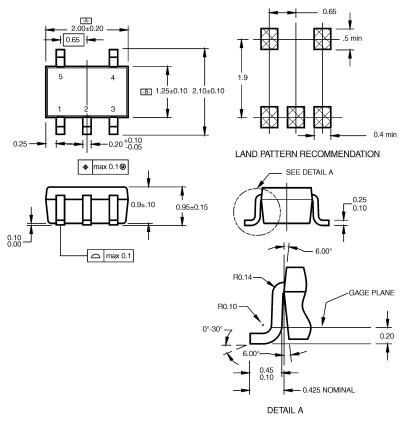

#### NOTES:


- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88A.
- $\ensuremath{\mathsf{B}}.$  DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.

C. DIMENSIONS ARE IN MILLIMETERS.

MAA05ARevC

5-Lead SC70, EIAJ SC-88a, 1.25mm Wide Package Number MAA05A

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

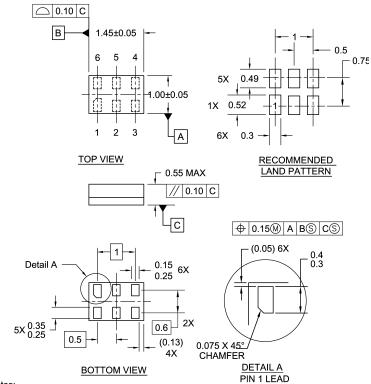

Notes:

- 1. JEDEC PACKAGE REGISTRATION IS ANTICIPATED 2. DIMENSIONS ARE IN MILLIMETERS 3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06ARevB

Pb-Free 6-Lead MicroPak, 1.0mm Wide Package Number MAC06A

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use

provided in the labeling, can be reasonably expected to result in significant injury to the user.

2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### PRODUCT STATUS DEFINITIONS

Definition of terms

<b>Datasheet Identification</b>	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only.

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and h

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative